

ASSA CODED 1.0

ASSA[®]
ASSA ABLOY

Electromechanical combination lock

ASSA ABLOY, the global leader
in door opening solutions



ASSA CODED 1.0 vertical



ASSA CODED 1.0 right



ASSA CODED 1.0 left

Application

ASSA CODED 1.0 is a standalone battery operated combination lock. The lock is designed as a key free alternative to traditional cabinet locks. The lock is intended for dry indoor spaces, but can be supplemented with a sealing accessory for use in damp indoor environments. The lock can be easily installed on new cabinets and even retrofitted to most cabinet where there is a need to replace an existing cabinet locks.

Properties

- 10 button keypad.
- User Codes are 4 digits long.
- Master and Sub-Master Codes are 8 digits long.
- Multiple User Code mode.
- One Time User Code mode (locker mode).
NOTE! For this feature we recommend ASSA CODED 1.2.
- 15,000 openings with 2 x AAA cells (supplied).
- Battery failure override using 9v battery across LED's (+/-) and Master Code.


- All parts / fixings / template included.
- Available in two lengths for mounting in doors up to 16 mm or 22 mm thickness.
- Utilizes the ASSA standard catch assortment.
- Available as vertical model (standard) / horizontal Right Hand (RH)/ horizontal Left Hand (LH).
- IP54 rated when used with the door gasket available as a separate part.
- Reinforcement plate for stronger attachment available as separate part.
- Zinc cast housing.

Function

CODED1.0 works as a traditional camlock, but instead of using a key to access the lock a code is entered on the keypad. The lock uses the same catches as ASSA camlocks, see data sheet for catches. Catches are ordered separately. The catch is possible to rotate + / - 90 °.

Electromechanical combination lock

ASSA ABLOY, the global leader in door opening solutions

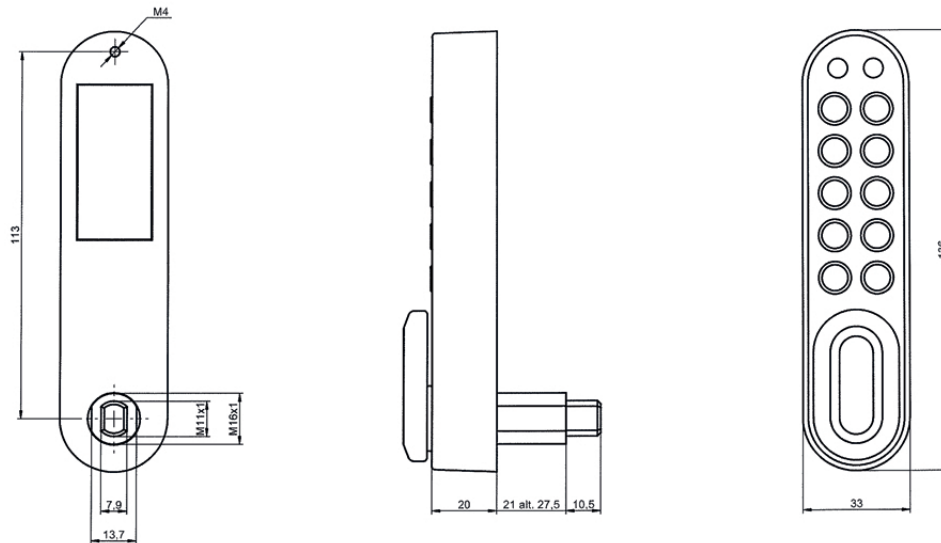

The lock can be set in two different modes:

Repeated use mode:

This is the default function and is already pre-programmed in new locks. It is the most common function and is used where the same code will be repeatedly used.

Single use mode (locker mode):

Single use mode is suitable for cabinets that are frequently used by various users such as cabinets in hotels, gyms, spas and the like. Users enter their 4-digit code, close the cabinet door and can then open the cabinet door again with the same code. The next user of the cabinet can then enter their own code, and the previous code is deleted. NOTE! When Single use mode is needed we recommended ASSA CODED 1.2, that includes a microswitch to prevent the risk for improper use.

Dimension

Data

- Powered by 2 standard AAA batteries.
- > 15.000 openings.
- Door thickness up to 22 mm.
- Uses ASSA OEM Standard catches.
- Meets IP54 with sealing accessory.
- Black color as standard, silver as an option.

Environmental

- For use in dry indoor environments.

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience

ASSA OEM AB
P.O. Box 371
SE-631 05 Eskilstuna
Sweden

Phone +46 (0)16 17 70 00
Fax +46 (0)16 17 71 77

Customer support:
Phone intl. +46 (0)16 17 70 00
e-mail: kundservice.etuna@assaabloy.com
www.assaabloy.com

Description	Article
CODED 1.0 VERTICAL 16 mm door BLACK	493 243 100 059
CODED 1.0 RIGHT HORIZONTAL 16 mm door BLACK	493 244 100 059
CODED 1.0 HORIZONTAL LEFT 16 mm door BLACK	493 245 100 059
CODED 1.0 VERTICAL 22 mm door BLACK	493 246 100 059
CODED 1.0 RIGHT HORIZONTAL 22 mm door BLACK	493 247 100 059
CODED 1.0 HORIZONTAL LEFT 22 mm door BLACK	493 248 100 059
CODED 1.0 REINFORCEMENTPLATE	493 259 100 000
CODED 1.0 SEALING	493 260 100 000
CODED 1.0 ACCESSORY PACKAGE	493 262 100 000